

شیر دستی تانکی شاکو

MODEL : TSV



عارسنت

alisanat.com



copyright © photo by alisanat.com

alisanat.com



copyright © photo by alisanat.com

alisanat.com



copyright © photo by alisanat.com

alisanat.com



copyright © photo by alisanat.com

alisanat.com




copyright © photo by alisanat.com

alisanat.com



copyright © photo by alisanat.com

Symbol



Features


1. Simply operating.
2. Large flow rate.
3. High safety.
4. Light weight.
5. 4 kinds of installation.
6. Twist lock is optional for safety operation.



How to order

TSV30043 - 02	N	B
TSV30043: 4/3 Way	Port size	Thread
TSV30042: 4/2 Way	02 : 1/4"	Blank : G
	03 : 3/8"	N : NPT
	04 : 1/2"	R : Rc
		Valve type
		Blank : Standard
		B : Ports on bottom
		C : With twist lock
		P : With panel mounting

Flow chart

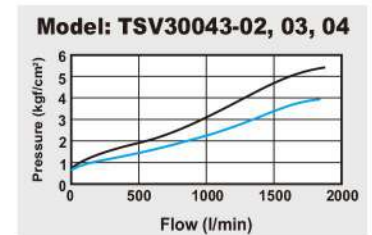


Specifications


Model	TSV30043(2)-02	TSV30043(2)-03	TSV30043(2)-04
Port size	1/4"	3/8"	1/2"
Body material	Aluminum alloy		
Panel dimension	M40 x P1.5 (For panel mounting only)		
Fluid	Compressed air		
Sectional area	18mm ²		
Operating pressure range	0 ~ 9 kgf/cm ²		
Proof pressure	10kgf/cm ²		
Ambient temperature	-10°C ~ 60°C		
Net weight	600g	580g	560g

■ Dimensions


TSV30043-02,03,04

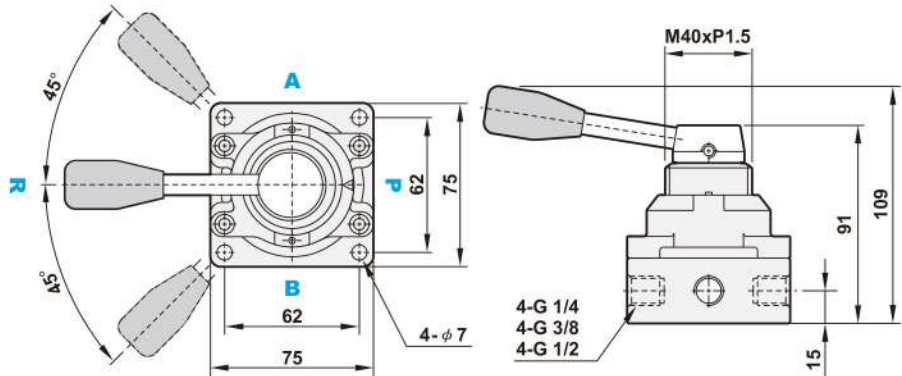


TSV30043-02,03,04 (B)

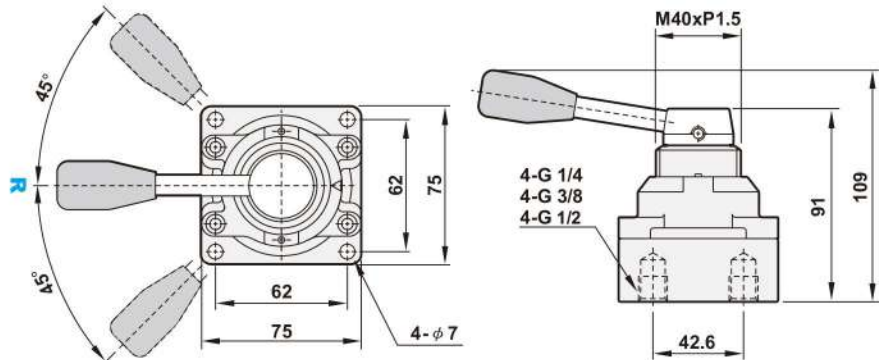

TSV30043-02,03,04 (C)

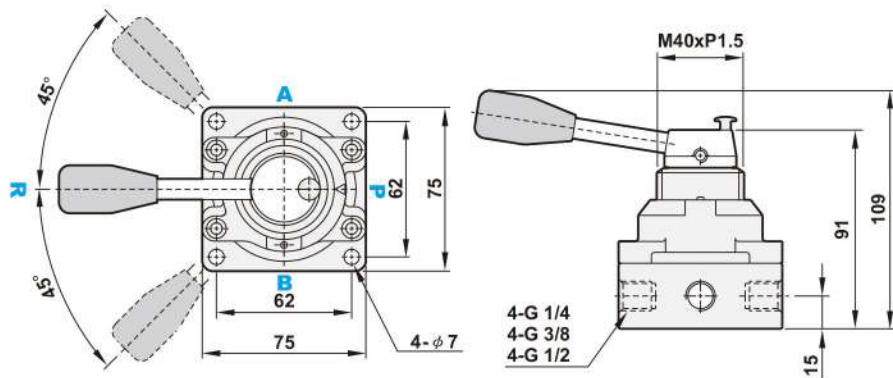


TSV30043-02,03,04 (P)

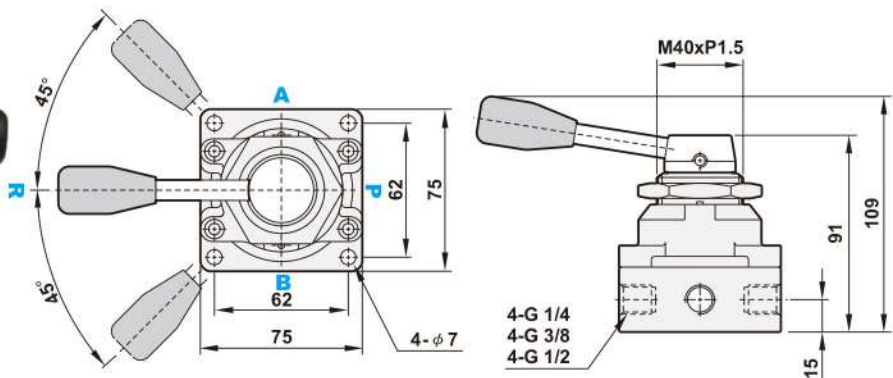



Operating steps for twist lock

Operating steps TSV30043C

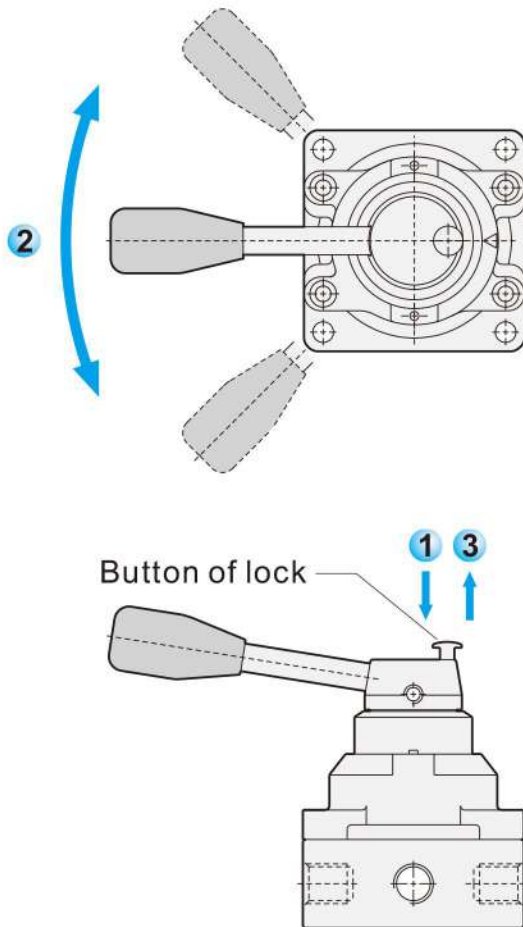


1. Push the button of lock down.
2. Turn lever to the left or right.

3. Release your hand to let the button of lock bound back.
4. Please do not turn lever when the button of lock bound back.

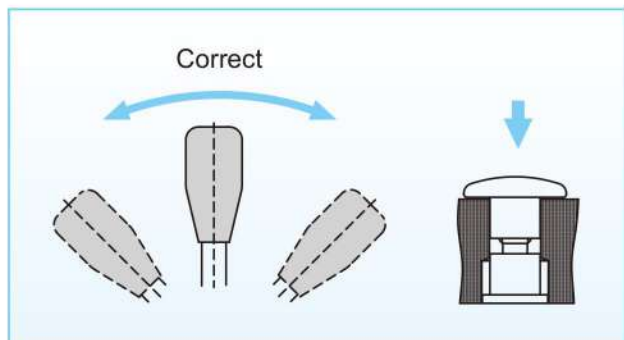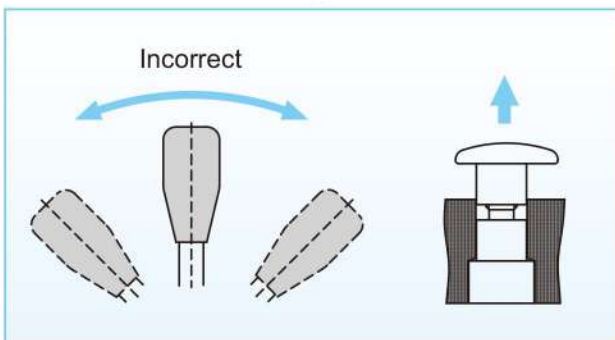

Explosion

Control unit

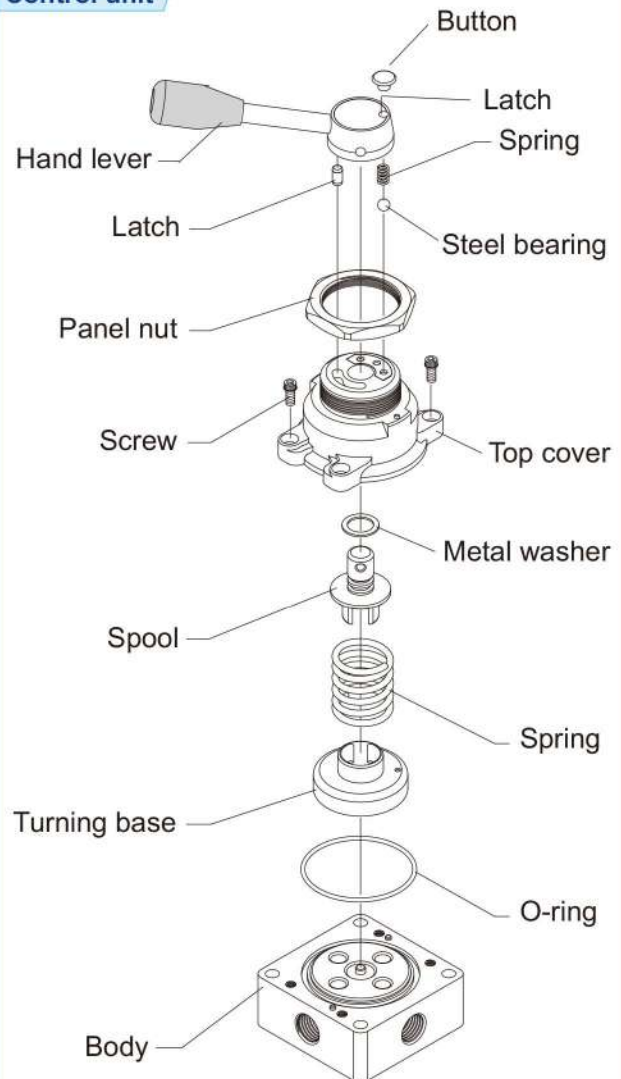



علی صنعت

طراحی و تنظیم این کاتالوگ صد درصد توسط شرکت علی صنعت انجام شده
و تمامی حقوق برای شرکت علی صنعت محفوظ می باشد

The design and layout of this catalog have been 100% done by
Ali Sanat Company and all rights are reserved for
Ali Sanat Company

021-33 112229

0912 3118117

www.alisanat.com